




INTEGRATED CIRCUITS AUDIO AMPLIFIER

New No.	Old No.	Description	Package No.	Specification Sheet No.
GEL234F1	PA234	General Purpose one-watt audio amplifier. Typical sensitivity is 600 mV.	F	85.28
GEL237F1	PA237	A versatile two-watt audio amplifier.	F	85.406
GEL239F2	PA239	Dual channel audio pre-amplifier, 12 volt operation.	F	85.407
GEL246S1	PA246	5 watt Audio Amplifier	S	85.408
GEL263S1	PA263	3.5 watt Audio Amplifier	S	85.409
GEL277S1		2 watt Dual Channel Audio Amplifier	S	85.414
GEL292		Two watt sound processor		85.418
GEL306S1		5 watt, 14 volt; 12 watt, 36 volt, audio amplifier with preamp	S	85.427





INTERMEDIATE FREQUENCY AMPLIFIER

New No.	Old No.	Description	Package No.	Specification Sheet No.
GEL292		2 watt sound processor	S	85.418

OPERATIONAL AMPLIFIER

New No.	Old No.	Description	Package No.	Specification Sheet No.
GEL230F1	PA230	High gain general purpose small signal operational amplifier	F	85.25
GEL741		Internally compensated operational amplifier	F,T,V	85.430
GEL1741		GEL741 in MiniMod package	AD	85.455

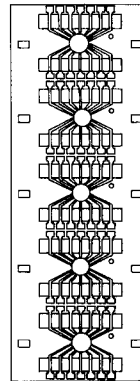

POWER CONTROL

New No.	Old No.	Description	Package No.	Specification Sheet No.
GEL271F1		Zero Voltage Switch	F	
GEL279F1		Phase Control and Triggering Circuit for Resistance and Induction Motor Load	F	
GEL300F1	PA424	Zero Voltage Switch plastic	F	85.21
GEL300E1	PA430	Zero Voltage Switch hermetic	E	
GEL301F1	PA436	Phase Control	F	85.31
GEL1494	PA1494	Precision Threshold Detector in Minimod package	AD	85.450

BIPOLAR PRODUCTS DIGITAL INTERFACE

New No.	Old No.	Description	Package No.	Specification Sheet No.
GED302T2	PD496	Dual Digital Receiver	T	85.236
GED303T2	PD497	Dual Digital Transmitter	T	85.237
GEL308	BCD-7	Segment driver with blanking	N	
GEL309	BCD-7	Segment driver with decimal point	N	

